


| | | | | |
|--|-------------|---|-------------|-------------|
| | Ausgabe | 1 | Erstellt | 30.11.99 Sz |
| | 1. Änderung | | 2. Änderung | |

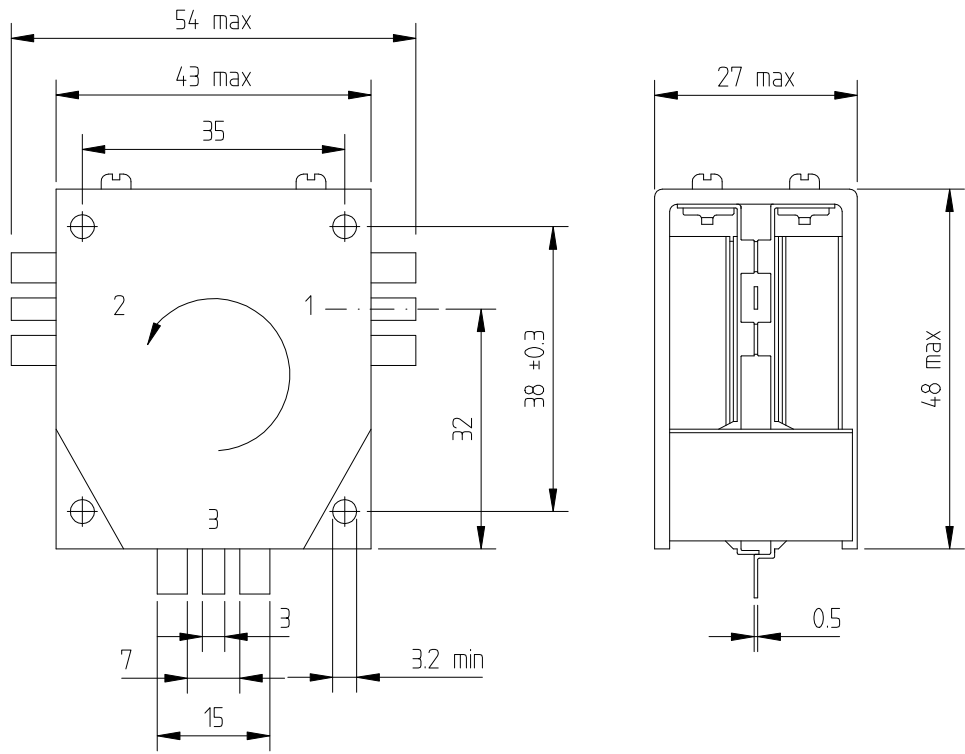

| | | | |
|-------------------|---|--------------------|------------|
| Frequency | : | 610...860MHz | |
| Temperature range | : | 0 ...+60°C | +60...80°C |
| Isolation | : | min 18dB | min 15dB |
| Insertion loss | : | max 0.40dB | max 0.40dB |
| VSWR | : | max 1.35 | max 1.45 |
| Power | : | 150W cw, 350W peak | |
| Connectors | : | solder pins | |
| Dimensions | : | 43x48x27 mm | |

| | | | | |
|--|-----|------------|-------------|----------------|
| | Art | Circulator | Artikel-Nr. | 2722 162 07421 |
| | Typ | VBH 742 | Blatt-Nr. | |