



Datei:	Ausgabe 1	Erstellt 7.03.2000 Sz
	1. Änderung	2. Änderung

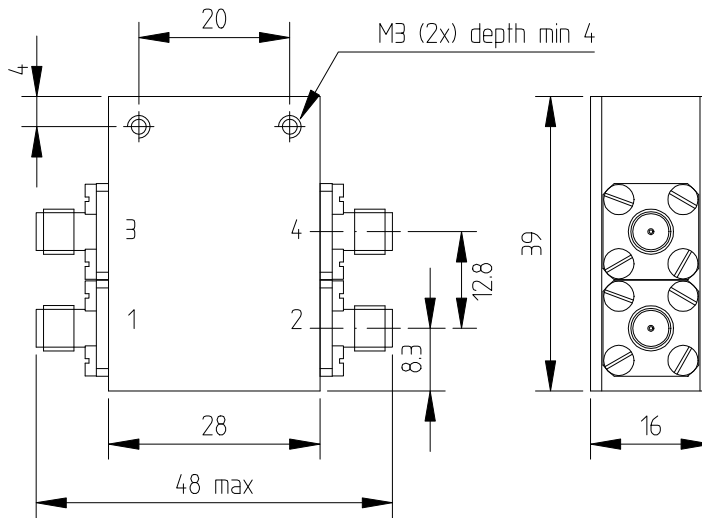

Frequency	:	1805...1880MHz
Isolation 4 - 1	:	min 23dB
Insertion loss 1 - 4	:	max 0.35dB
VSWR	:	max 1.20
VSWR of monitors	:	max 1.30
port 1 to 2	:	27dB ± 0,5dB
port 4 to 3	:	27dB ± 0,5dB
port 1 to 3	:	50dB
port 4 to 2	:	50dB
Power	:	40W cw; 70W peak 20us
Power in load	:	<40W, < 4min
Intermodulation	:	75dB below carrier or -40dBm which ever is higher
Temperature range	:	-10 ...+85°C
Connectors	:	SMA (4 x female)
Dimensions	:	28x39x16 mm

M 1 : 1	Art	Isolator	Artikel-Nr.	2722 162 0881 1
	Typ	VFS 881	Blatt-Nr.	
bearbeitet :	geprüft :	 Bauelemente GmbH, Hamburg		